



Stair Nose

Installation without using Shim for floors from 7 - 9.5mm in thickness.

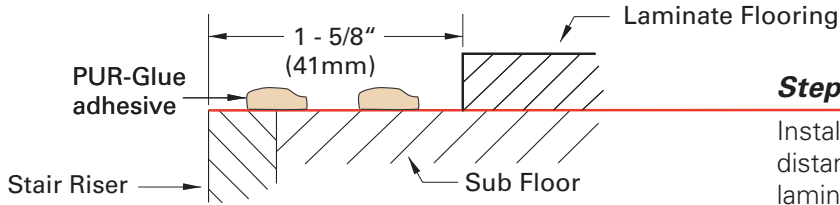


Step 1

Install the riser flush to the Stair. Leave 1-5/8" (41mm) distance between the outer edge of the riser and the laminate floor. Put down two lines of construction adhesive.

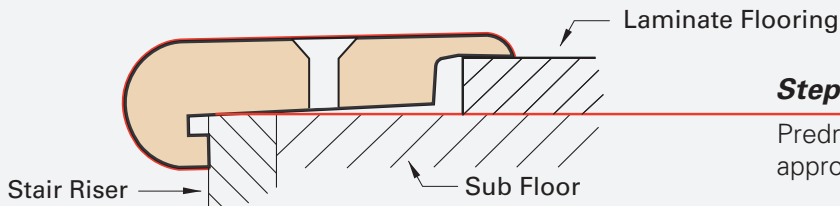

Step 2


Predrill and countersink the stair nose in a distance of approximately 10".

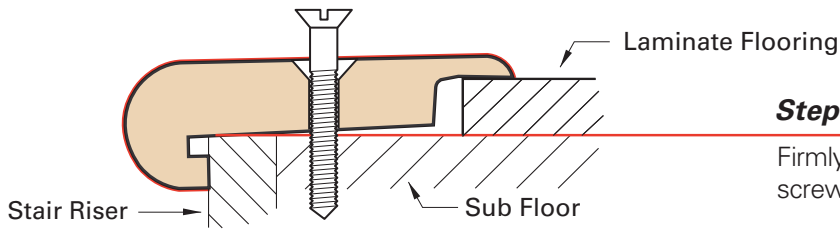

Step 3


Firmly screw the molding to the stair. Finish up the 6 x 1-1/4" screws with a color matching Color Fill.

Installation using Shim for floors from 9.5 - 12.3mm in thickness.

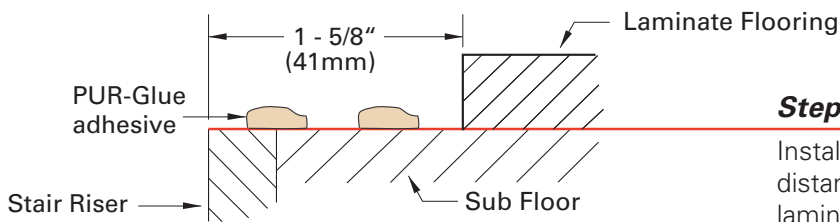


Step 1

Install the riser flush to the Stair! Leave 1-5/8" (41mm) distance between the outer edge of the riser and the laminate floor. Put down two lines of construction adhesive.

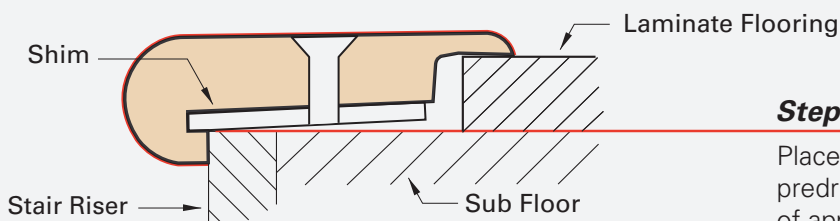

Step 2

Place the Shim on the bottom of the molding and predrill and countersink the stair nose in a distance of approximately 10".

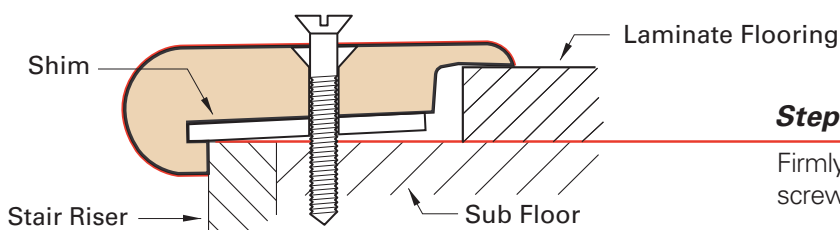

Step 3

Firmly screw the molding to the stair. Finish up the 6 x 1-1/4" screws with a color matching Color Fill.